

Characteristics:

Directly fixed on the copper platoon of 17x4, fully enclosed, mechanical and environmental with excellent performance, strong capability of voltage isolation, safe and reliable.



Technical index:

- Mounting type: Free hanging (In-Line)
- Material of the core: Laminated silicon steel
- Flame resistance: UL94-V0
- Applicable standards: GB20840-2014
- Operating temperature: -20℃~+70℃
- Storage temperature: -30℃~+80℃
- Work frequency: 50HZ-60Hz
- Dielectric strength: 6KV 50Hz 1min

Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Model	TA1704L								unit
Rated input	15	20	25	35	40	50	65	75	A
Rated output	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	A
Turns ratio	1:150	1:200	1:250	1:350	1:400	1:500	1:650	1:750	
Linearity	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	%
Sampling resistance	6	8	10	14	16	20	26	30	Ω
Weight	60	60	60	60	60	60	60	60	g


Dimensions (in mm±0.5) :

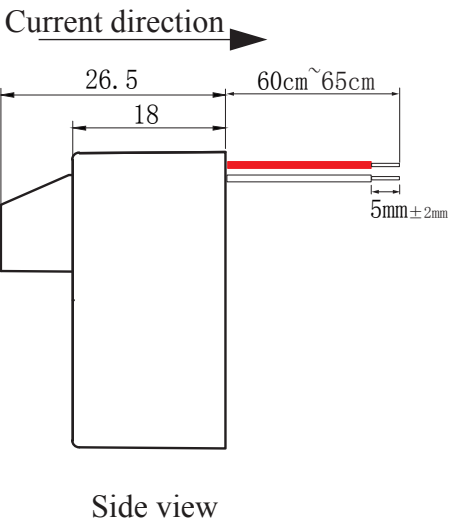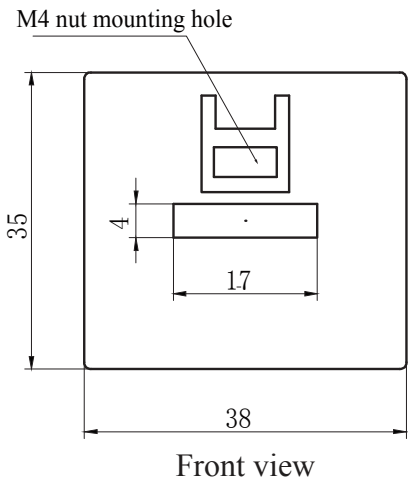

Standard output parameter table:
(Factory test is based on the full-load votage)



Schematic diagram:



Specifications of cable:
0.3mm² red and white high-temperature wire
The length of cable: 60cm~65cm
Color of lcable: red, white