

3-SCT006L-RJ12



Characteristics:

Three-phase integrated split core current transformer, easy installation, RJ12 connector output.

Product picture printing is for reference only, subject to the actual product

Technical index:

Mounting type: Free hanging (In-Line)

Material of core: Ferrite

Applicable standards: GB20840-2014

Operating temperature: -25 °C ~ +60 °C

Storage temperature: -30 °C ~ +90 °C



Frequency range: 50Hz-1KHz

Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/Housing AC 3.5KV/1min 50Hz




Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product



Rated input	5			10			20			A
	2.5	5	5	5	10	20	20	25	mA	
Rated output	2.5	5	5	5	10	20	20	25		
Turns ratio	1:2000	1:1000	1:500	1:2000	1:1000	1:500	1:1000	1:800	-	
Accuracy	0.5	0.5	1	0.5	0.5	1	1	1	%	
Sampling resistance	10	5	5	10	5	5	5	5	Ω	
Phase shift	-									
Weight	90									
	g									

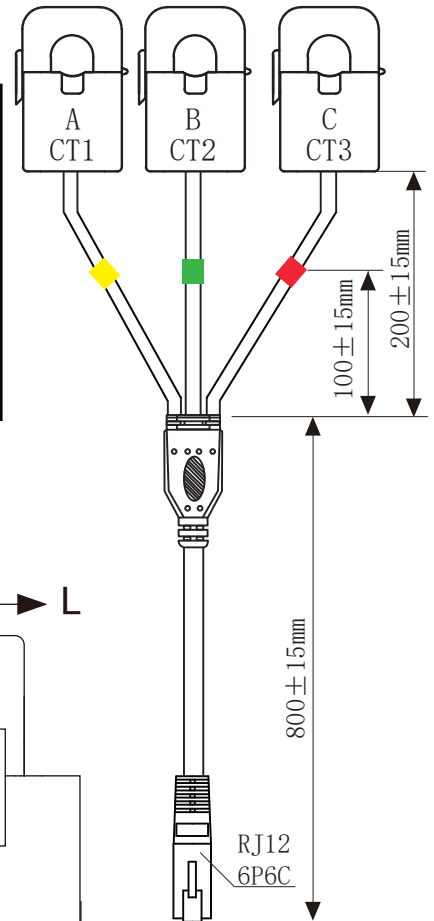

Dimensions (unit mm±0.5) :

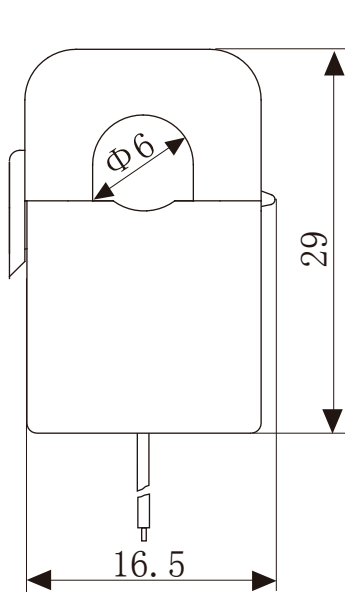

Front view

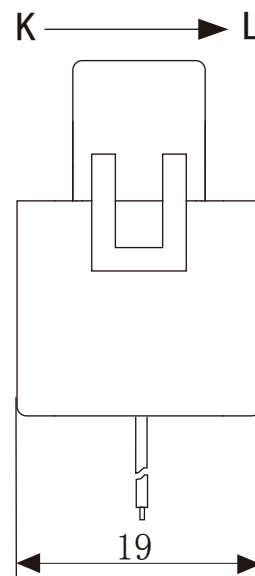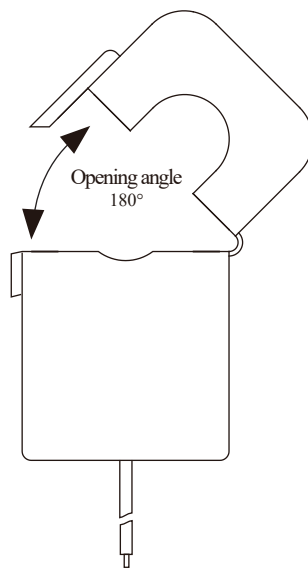

Side view

