



Epoxy potting, nanocrystalline core, small size, fully enclosed, remote monitoring of electrical load, as the input signal of the electronic control system, phase loss indication, electric quantity measurement, motor running state monitoring.


Dielectric strength: 3.5KV 50Hz 1min

Product picture :(the printed words are for reference only, subject to the actual product)




Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)


| Model               | TA1309<br>-100 | TA1309<br>-200 | Unit     |
|---------------------|----------------|----------------|----------|
| Rated input         | 5              | 5              | A        |
| Rated output        | 5              | 2.5            | mA       |
| Turns ratio         | 1: 1000        | 1: 2000        |          |
| Linearity           | $\leq 0.3$     | $\leq 0.2$     | %        |
| Sampling resistance | 150            | 800            | $\Omega$ |
| Weight              | 11             | 11             | g        |

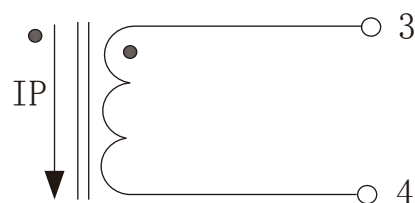


Current output type  
the secondary is not allowed to open

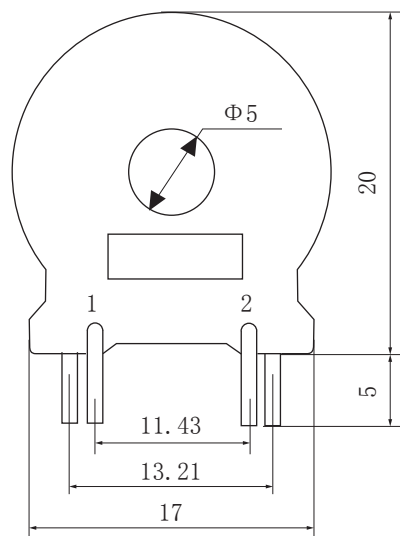

### Front view

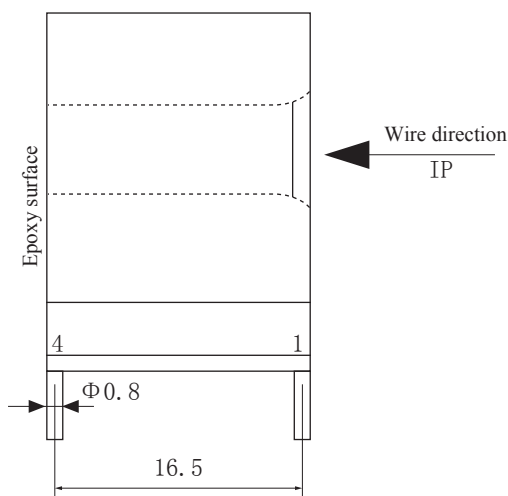

### Side view

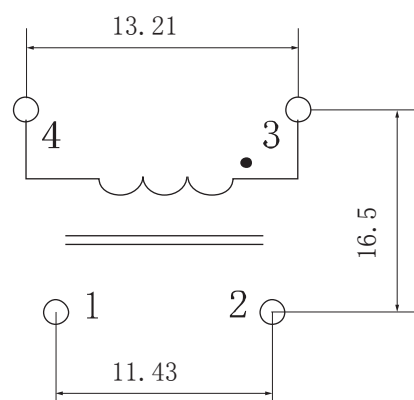

Feet 1 and 2 are empty