


Characteristic:
Safety lock buckle, easy installation, screw terminal output.

Product picture : (the printed words are for reference only, subject to the actual product)


Technical index:
Mounting type: Free hanging (In-Line)
Material of core: Ferrite(High Permeability)
Applicable standards: GB20840-2014
Operating temperature: -40℃ ~ +50℃
Storage temperature: -40℃ ~ +60℃
Frequency range: 50Hz-1KHz
Phase difference: 18' (Typical value)
Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz





Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	50	100	200	A	 Voltage output type Secondary is not allowed to short circuit
Rated output	0.333/1/3/5			V/AC	
Accuracy	0.5			%	
Weight	204			g	

Dimensions (in mm±0.5) :

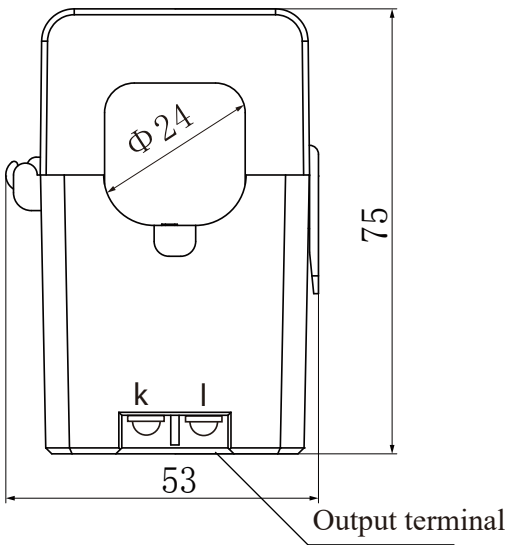

Front view

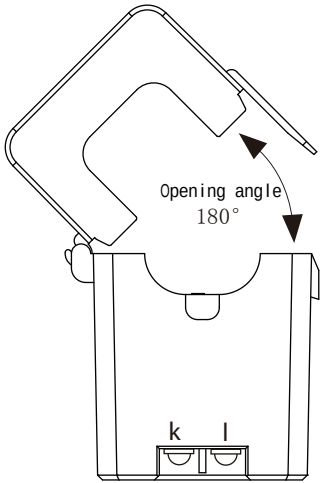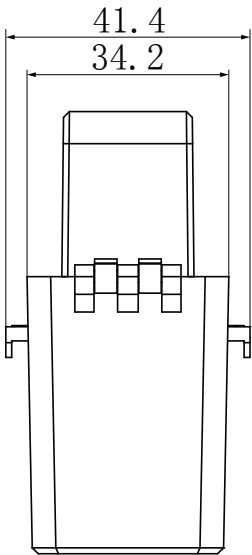

Side view