

Characteristic:

Safety lock buckle, easy installation, cable output.

Product picture : (the printed words are for reference only, subject to the actual product)

Technical index:


- Mounting type: Free hanging (In-Line)
- Material of core: Ferrite
- Applicable standards: GB20840-2014
- Operating temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
- Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
- Frequency range: 50Hz-1KHz
- Dielectric strength: Input (bare conductor)/Output AC 800V/1min 50Hz
Output/housing AC 3.5KV/1min 50Hz





Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Rated input	20		50			60	80			A	Specifications of cable: 0.3mm ² black and white twisted pair The length of cable: 50cm~55cm TVS: Transient Voltage Suppressor (7.5V) Current output type Secondary is not allowed to open circuit	
	Rated output	20	10	50	25	16.6	20	80	40			26.6
Turns ratio	1:1000	1:2000	1:1000	1:2000	1:3000	1:3000	1:1000	1:2000	1:3000	-		
Sampling resistance	10											Ω
Accuracy	1											%
Phase shift	$\leq 184'$											'
Weight	45											g

Dimensions (in mm ± 0.5) :

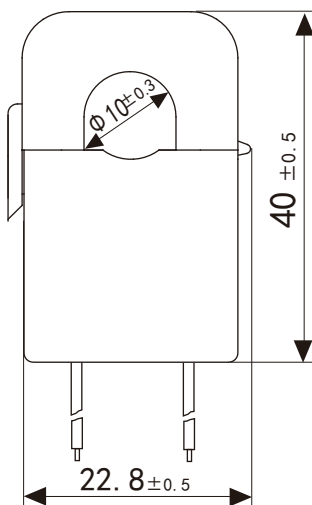

Front view

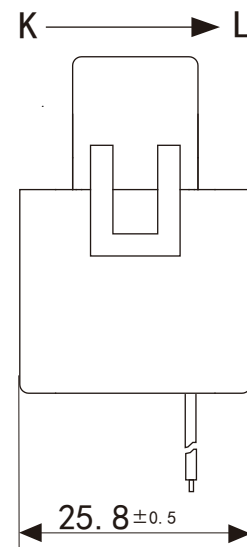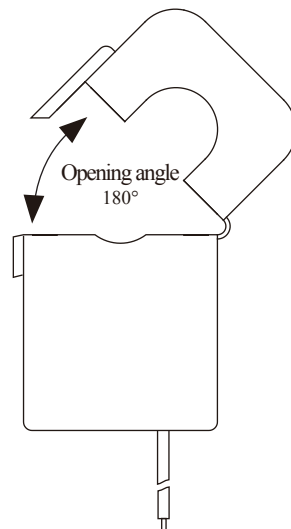

Side view